


Desso Textile floor covering

AirMaster® 4C's (AirMaster® 4 Home)

Specification according to EN 1307

Type of manufacture	ISO 2424	Tufted 5/32 "						
Aspect	ISO 2424	Structured loop pile						
Dye method	Piece dyed continuous							
Width	cm	400	ft	13.1				
Primary backing	ISO 2424	Polypropylene woven + fleece						
Secondary backing	ISO 2424	Polypropylene woven - Sandwich Backing						
Pile fibre composition	ISO 2424	BCF Polyamide 6						
Total thickness	ISO 1765	mm	7.0	inch	0.3			
Effective pile thickness	ISO 1766	mm	3.9	inch	0.15			
Total mass	ISO 8543	g/m ²	1870	oz/yd ²	55.2			
Total pile mass	ISO 2424	g/m ²	760	oz/yd ²	22.4			
Effective pile mass	ISO 8543	g/m ²	450	oz/yd ²	13.3			
Pile density	ISO 8543	g/cm ³	0.115	lb/in ³	0.0042			
Number of tufts	ISO 1763	/dm ²	1134	/yd ²	94814			
Stroll test	ISO 6356	kV	≤ 2,0					
Vertical resistance	ISO 10965	Ohm	-					
Horizontal resistance	ISO 10965	Ohm	-					
Use classification	EN 1307	23 Domestic - heavy use						
Luxury rating	EN 1307	LC 1						
Impact sound reduction ΔL _w	ISO 10140	dB	-					
Sound absorption	ISO 354	Freq. Hz	125	250	500	1000	2000	4000
		α _s	-	-	-	-	-	-
Noise reduction	ISO 354	α _w	-					
Thermal resistance	ISO 8302	m ² .K/W	≤ 0,17					
Flammability	EN 13501-1	Cfl - s1 (glued tested)						
Prodis - GUT	www.pro-dis.info	E6CB5641						

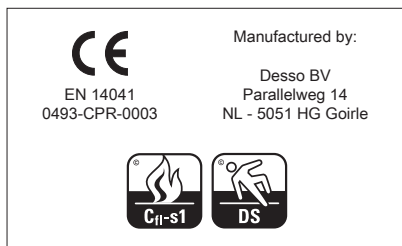

** ECONYL® is a yarn made from 100% regenerated content. The total % of regenerated content varies per product and per colour. Whether a colour contains ECONYL® and the exact % thereof can be found on our website: www.desso.com.

Desso flooring products are to be installed in full accordance with Desso's installation instructions and recognised trade standards. An effective, regular cleaning and maintenance programme is vital for retaining a high appearance level. Desso flooring products should only be used as floorcoverings. Note: Desso reserves the right to amend this specification without giving prior notice. For the latest versions of the technical specifications, visit www.desso.com

EN-20150929