


Desso Textile floor covering

Gravure WFH1400

Preliminary specification according to EN 1307

Type of manufacture	ISO 2424	Tufted 1/8 "						
Aspect	ISO 2424	Cut pile						
Dye method		Print						
Width		cm	400	ft	13.1			
Primary backing	ISO 2424	Polyester - polyamide fleece						
Secondary backing	ISO 2424	Felt backing 550g						
Pile fibre composition	ISO 2424	80% wool - 20% polyamide						
Total thickness	ISO 1765	mm	12.0	inch	0.5			
Effective pile thickness	ISO 1766	mm	6.3	inch	0.25			
Total mass	ISO 8543	g/m ²	2975	oz/yd ²	87.8			
Total pile mass	ISO 2424	g/m ²	1290	oz/yd ²	38.1			
Effective pile mass	ISO 8543	g/m ²	945	oz/yd ²	27.9			
Pile density	ISO 8543	g/cm ³	0.150	lb/in ³	0.0054			
Number of tufts	ISO 1763	/dm ²	1325	/yd ²	110783			
Stroll test	ISO 6356	kV	≤ 2,0					
Vertical resistance	ISO 10965	Ohm	-					
Horizontal resistance	ISO 10965	Ohm	-					
Use classification	EN 1307	32 Commercial - general use						
Luxury rating	EN 1307	LC 4						
Impact sound reduction ΔL_w	ISO 10140	dB	39					
Sound absorption	ISO 354	Freq. Hz	125	250	500	1000	2000	4000
		α_s	-	-	-	-	-	-
Noise reduction	ISO 354	α_w	0.40					
Thermal resistance	ISO 8302	m ² .K/W	0.230					
Flammability	EN 13501-1	Cfl - s1 (glued tested)						
Prodis - GUT	www.pro-dis.info	-						

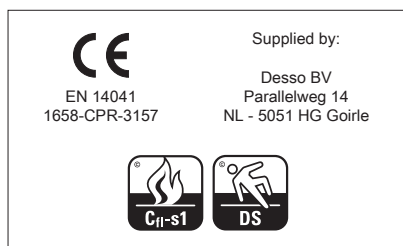

Desso flooring products are to be installed in full accordance with Desso's installation instructions and recognised trade standards. An effective, regular cleaning and maintenance programme is vital for retaining a high appearance level. Desso flooring products should only be used as floorcoverings. Note: Desso reserves the right to amend this specification without giving prior notice. For the latest versions of the technical specifications, visit www.desso.com

EN-20150929