

Torso Marine EcoBase™


Preliminary specification according to EN 1307

Type of manufacture	ISO 2424	Tufted 1/10 "						
Aspect	ISO 2424	Cut pile						
Dye method	Piece dyed continuous							
Dimension	EN ISO 24342	cm x cm	50 x 50 / 19,68" x 19,68" (20 tiles per box)					
Primary backing	ISO 2424	Polyester fleece						
Secondary backing	ISO 2424	DESSO EcoBase® * - Containing at least 75% C2C positively defined recycled content						
Pile fibre composition	ISO 2424	BCF Polyamide 6.6						
Total thickness	ISO 1765	mm	7.0	inch	0.3			
Effective pile thickness	ISO 1766	mm	4.0	inch	0.16			
Total mass	ISO 8543	g/m ²	4200	oz/yd ²	124.0			
Total pile mass	ISO 2424	g/m ²	850	oz/yd ²	25.1			
Effective pile mass	ISO 8543	g/m ²	650	oz/yd ²	19.2			
Pile density	ISO 8543	g/cm ³	0.163	lb/in ³	0.0059			
Number of tufts	ISO 1763	/dm ²	1890	/yd ²	158023			
Stroll test	ISO 6356	kV	≤ 2,0					
Vertical resistance	ISO 10965	Ohm	≤ 1 x 10 ⁹					
Horizontal resistance	ISO 10965	Ohm	-					
Use classification	EN 1307	33 Commercial - heavy use						
Luxury rating	EN 1307	LC 3						
Dimensional stability	EN 986	%	≤ 0,2					
Impact sound reduction ΔL _w	ISO 10140	dB	23					
Sound absorption	ISO 354	Freq. Hz	125	250	500	1000	2000	4000
		α _s	0.00	0.04	0.07	0.19	0.33	0.44
Noise reduction	ISO 354	α _w	0.15					
Thermal resistance	ISO 8302	m ² .K/W	0.080					
Flammability	EN 13501-1							
Prodis - GUT	www.pro-dis.info	-						

Manufactured by:
 Tarkett BV
 Taxandriaweg 15
 NL - 5142 PA Waalwijk

EN 14041

Product is also certified for:
 Certificate of Fire Approval IMO Res. MSC.
 307 (88) - (FTP Code), Annex 1, Part 2.
 Suitable for restricted areas only (cabins and corridors), not suitable for escape routes.

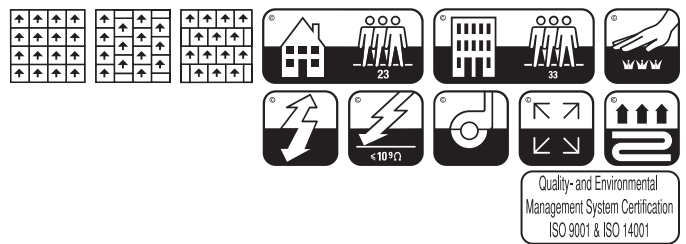

Quality- and Environmental
 Management System Certification
 ISO 9001 & ISO 14001



* DESSO EcoBase® is a polyolefin based backing. Positively defined means: all ingredients have been assessed as either Green (optimal) or Yellow (tolerable) according to the Cradle to Cradle® assessment criteria. As described in Cradle to Cradle® Certified CM Product Standard Version 3.0. The total % of recycled content varies per product and per colour which can be found on our website: www.tarkett.com

Tarkett's flooring products are to be installed in full accordance with DESSO installation instructions and recognized trade standards. An effective, regular cleaning and maintenance program is vital for retaining a high appearance level. Tarkett's flooring products should only be used as floorcoverings. Note: Tarkett reserves the right to change this specification without prior notice; changes are subject to normal production tolerances. For the latest versions of the technical specifications, visit www.tarkett.com

EN-20191114